2.Exploded Views and Parts List

2-1 Cassette Deck :ADR248AMW1(OPTION)

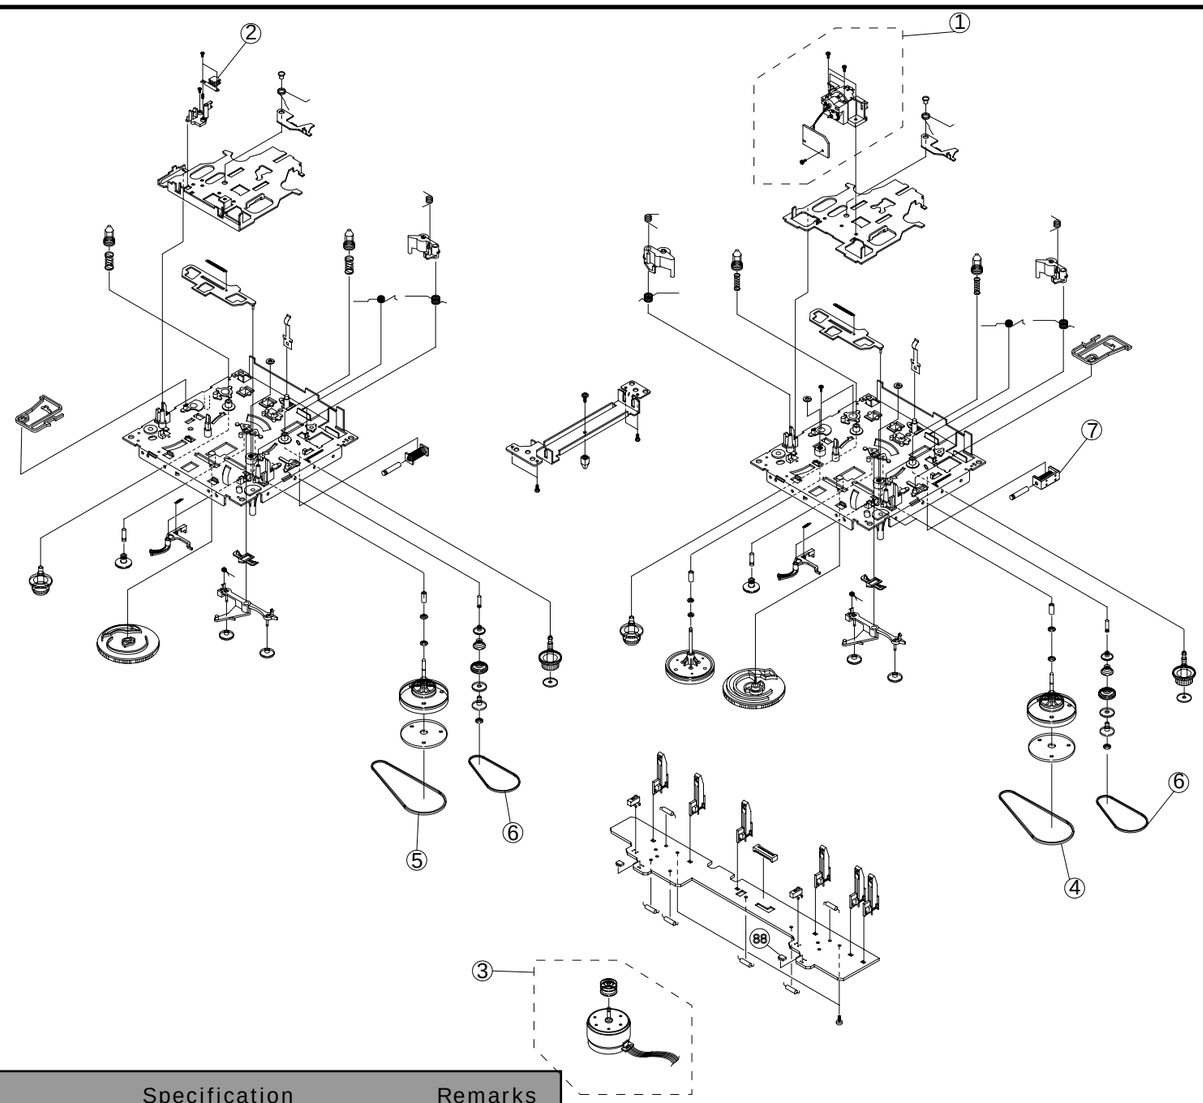

No.	Code No.	Description	Specification	Remarks
	AH59-00123A	ASS'Y DECK	ADR248AMW1	
1	AH81-00098A	ASS.Y RP HEAD	TR981PA	MT91-11011S
2	AH81-00423A	HEAD PB	YB-7442CB09	MT59-00054A
3	AH81-00422A	ASS,Y MOTOR	ADR2400-CCM090L2	MT91-15013Y
4	AH81-00364A	BELT MAIN1	ADR2400-MAIN 0.5	6602-001056
5	AH81-00365A	BELT MAIN2	ADR2400-MAIN 1.3	6602-001057
6	AH81-00101A	BELT SUB	ADR2400-FR	6602-001055
7	AH81-00102A	SOLENOID	ADR2400-1	MT75-00049A

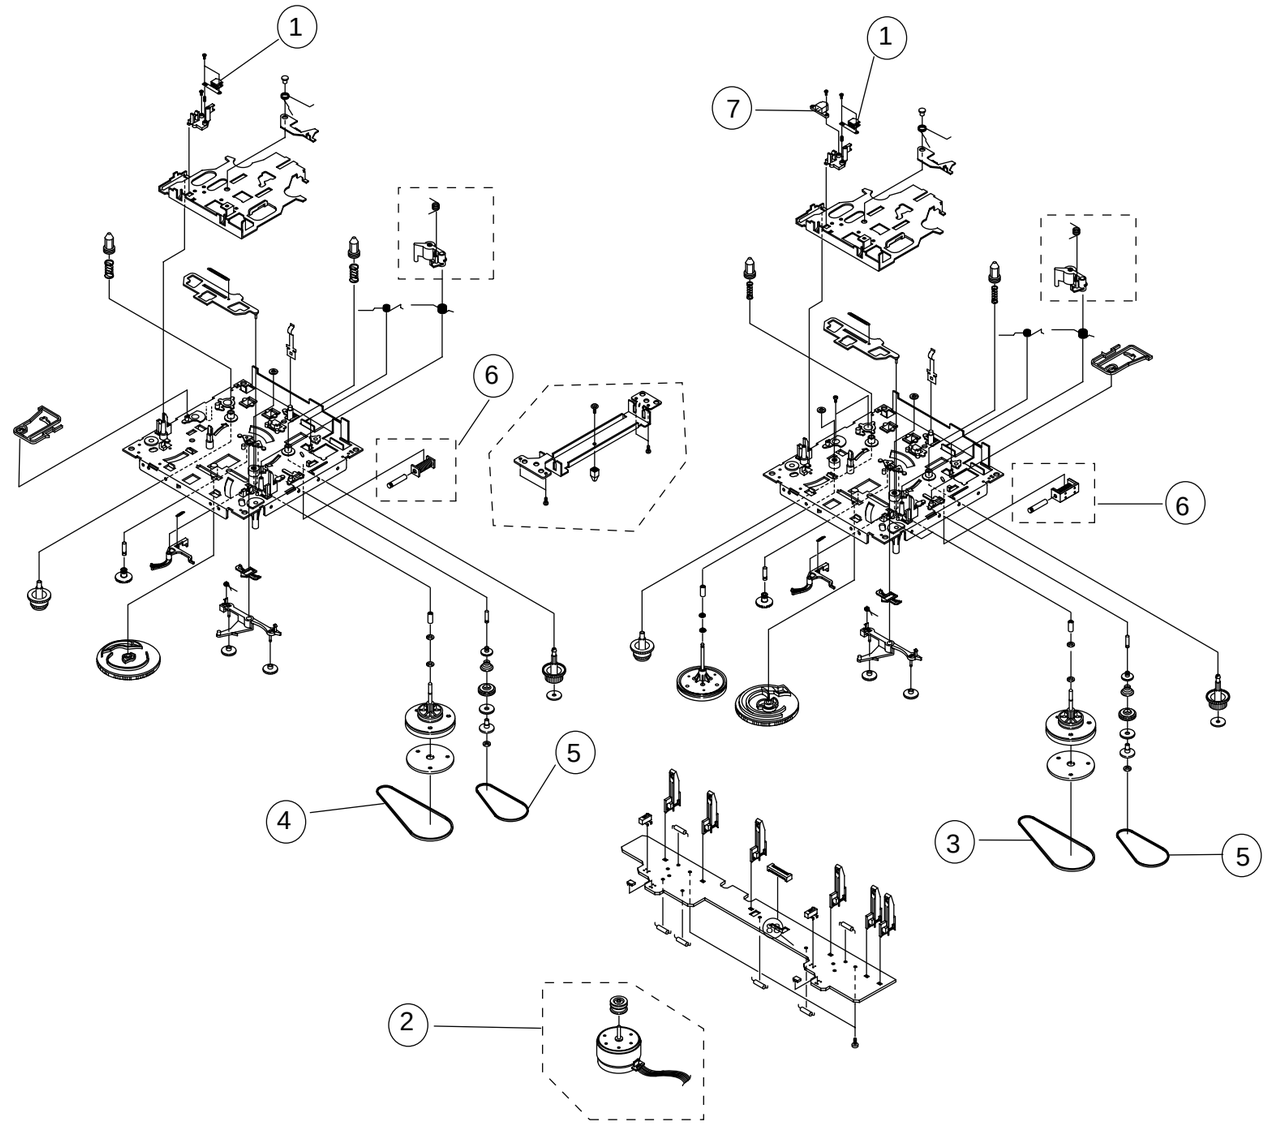

No.	Code No.	Description	Specification	Remarks
	AH59-00118A	ASS'Y DECK	ADR248DSW1	
1	AH81-00423A	HEAD	YB-7442CB09	MT59-00054A
2	AH81-00422A	ASS,Y MOTOR	ADR2400-CCM09-120L2	MT91-15013Y
3	AH81-00364A	BELT MAIN1	ADR2400-MAIN 0.5	6602-001056
4	AH81-00365A	BELT MAIN2	ADR2400-MAIN 1.3	6602-001057
5	AH81-00101A	BELT SUB	ADR2400-FR 34.7	6602-001055
6	AH81-00102A	SOLENOID	ADR2400-1	MT75-00049A
7	AH81-00424A	E-HEAD	E-621RM	MT59-00055A

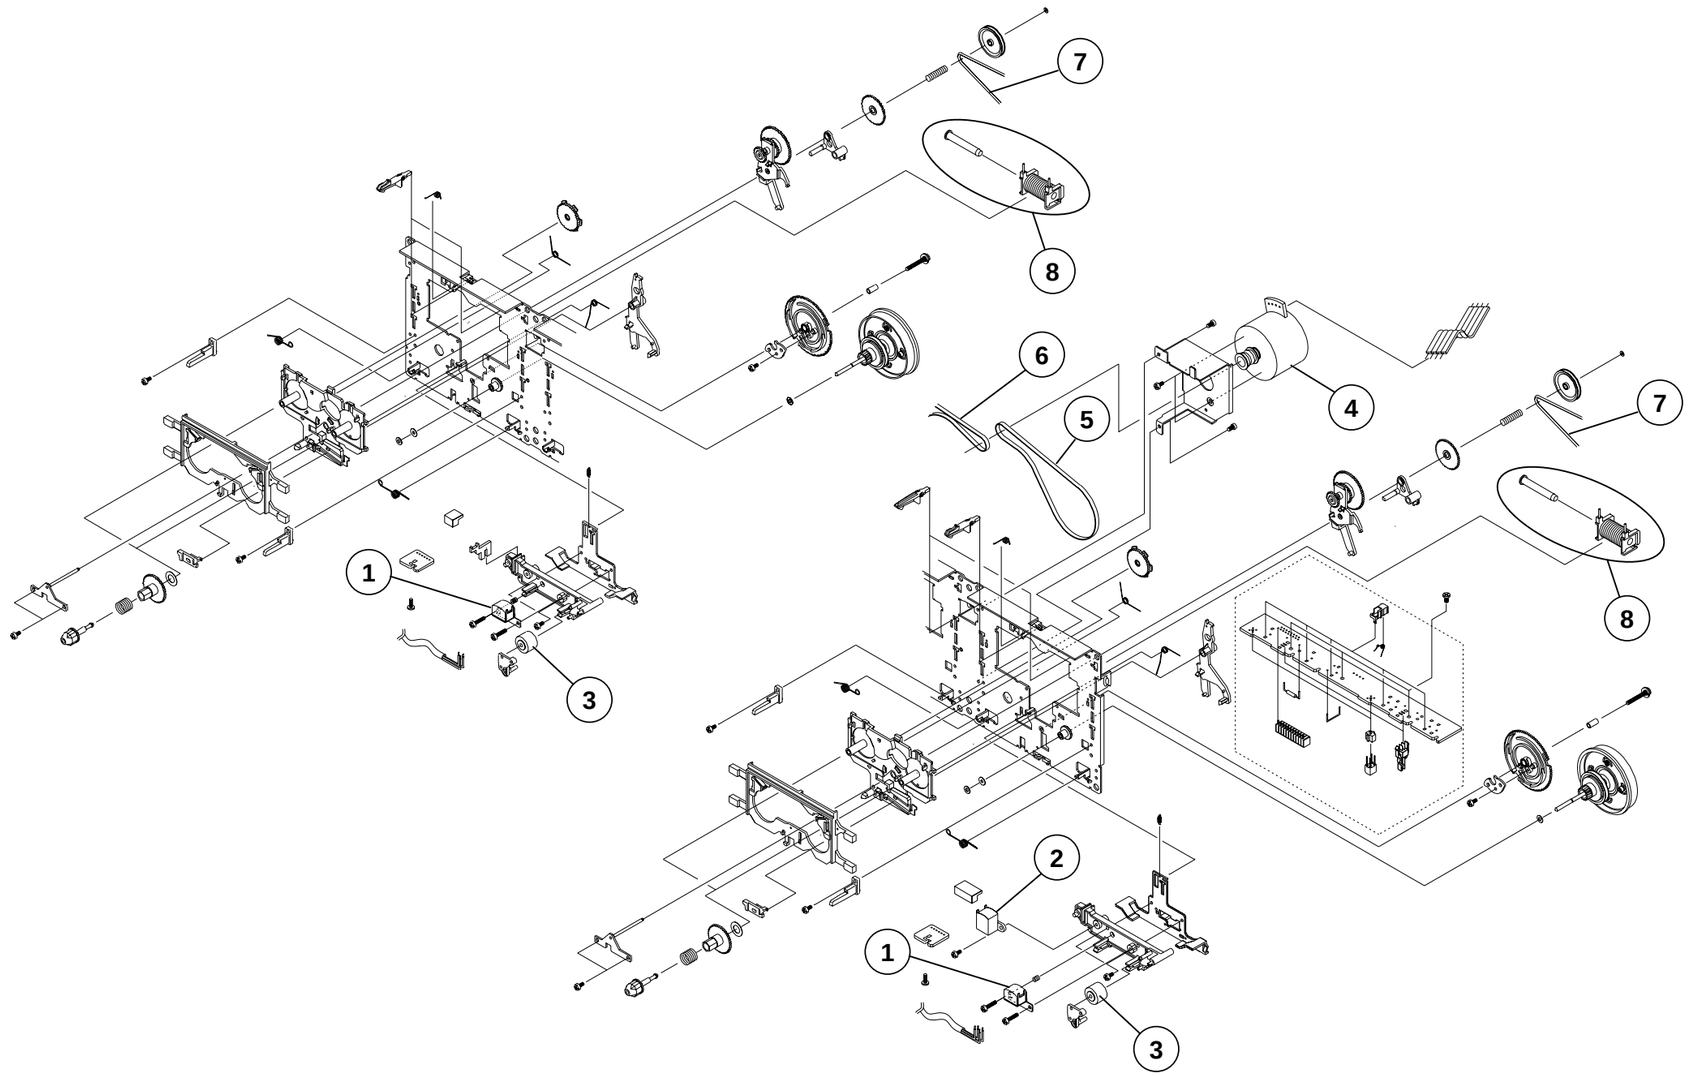

No.	Code No.	Description	Specification	Remarks
	AH59-00126A	ASS'Y DECK	CWL43FF36	
1	AH81-00472A	PB HEAD	TC881CB067P	TC881CB067P
2	AH81-00472B	E HEAD	TC2131	TC2131
3	AH81-00472N	ROLLER PINCH	22-027-41054	22-027-41054
4	AH81-00472W	ASS'Y MOTOR	SHU2L61	50-093-4643
5	AH81-00472C	BELT BF	02-084-4204	02-084-4204
6	AH81-00472D	BELT AF	02-084-4202	02-084-4202
7	AH81-00472X	BELT FR	02-083-4188	02-084-4202
8	AH81-00474A	SOLENOID	50-093-4145	50-093-4145

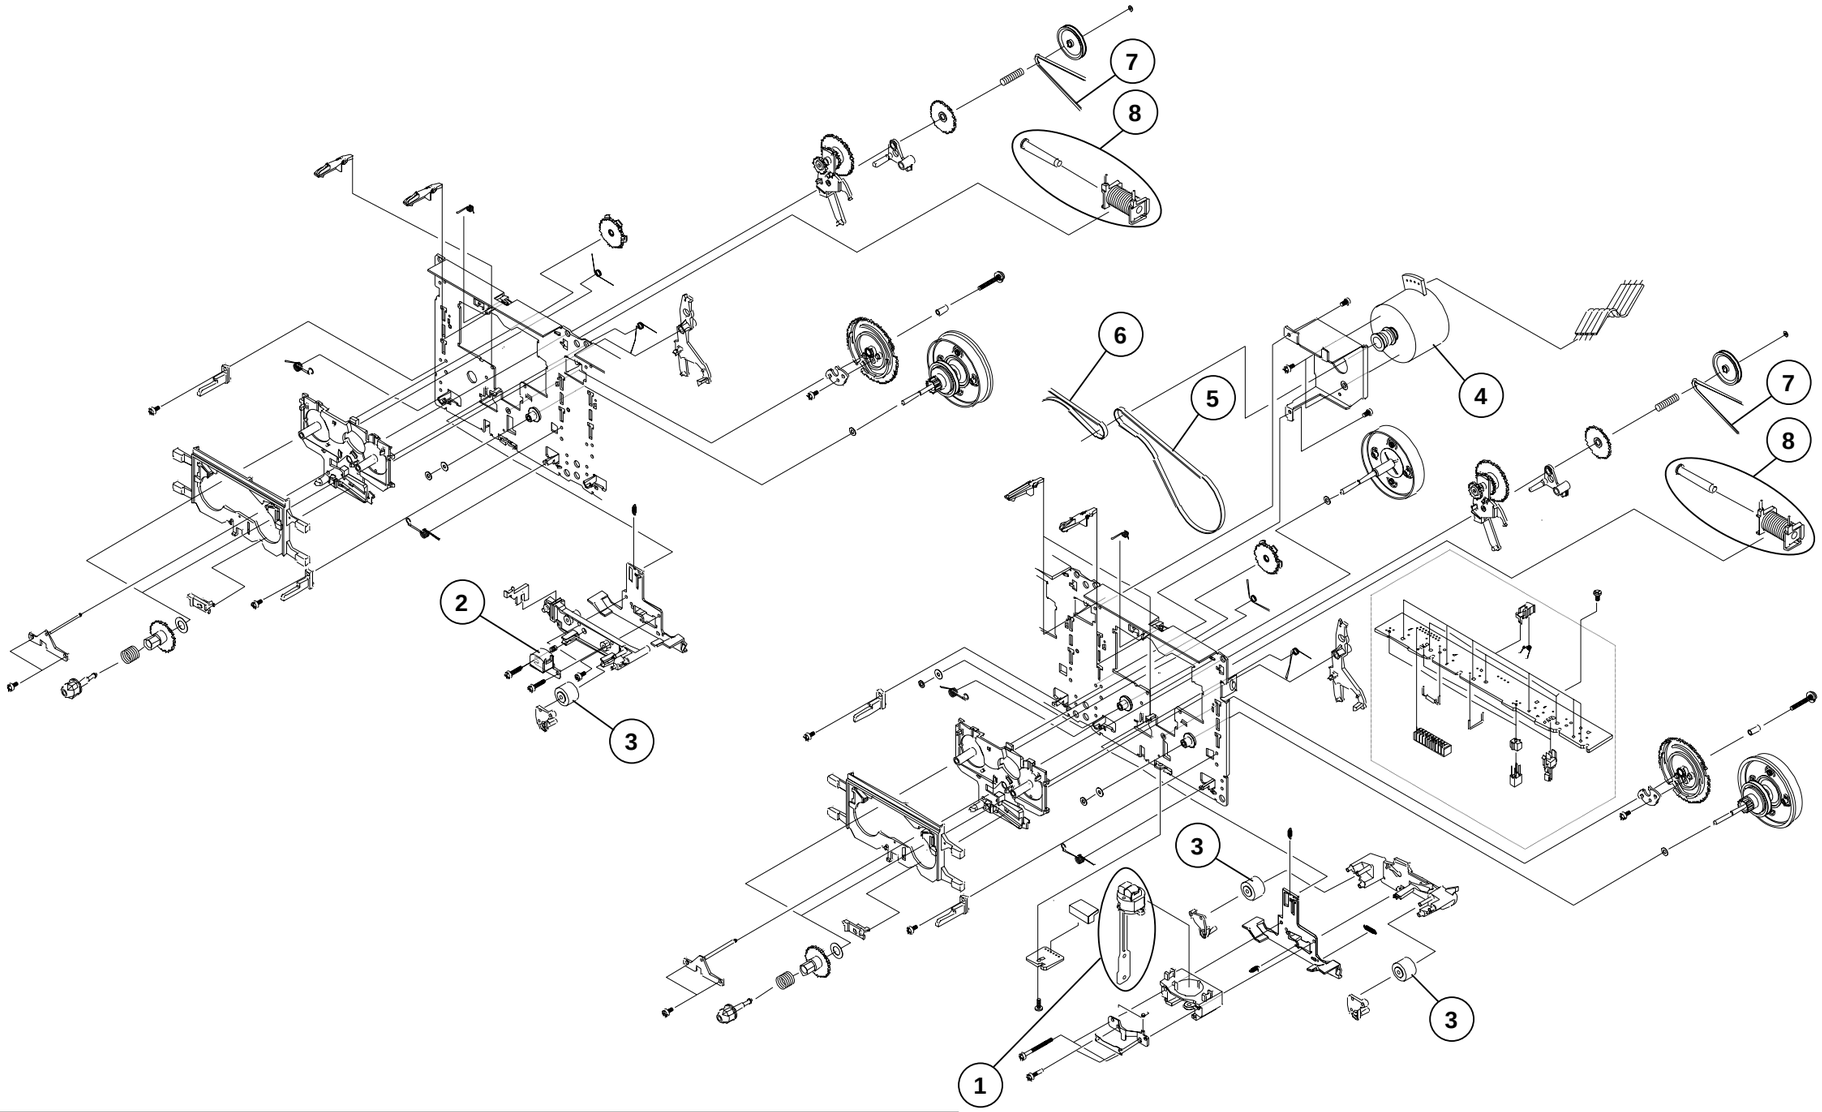

No.	Code No.	Description	Specification	Remarks
	AH59-00126B	ASS'Y DECK	CWL43FR37	
1	AH81-00472E	ASS'Y R/P HEAD	50-093-4653	50-093-4653
2	AH81-00472A	PB HEAD	TC881CB067P	TC881CB067P
3	AH81-00472N	ROLLER PINCH	22-027-41054	22-027-41054
4	AH81-00472W	ASS'Y MOTOR	SHU2L61	50-093-4643
5	AH81-00472F	BELT BR	02-084-4205	02-084-4205
6	AH81-00472D	BELT AF	02-084-4202	02-084-4202
7	AH81-00472X	BELT FR	02-083-4188	02-084-4202
8	AH81-00474A	SOLENOID	50-093-4145	50-093-4145

2-5-1 Total Exploded View

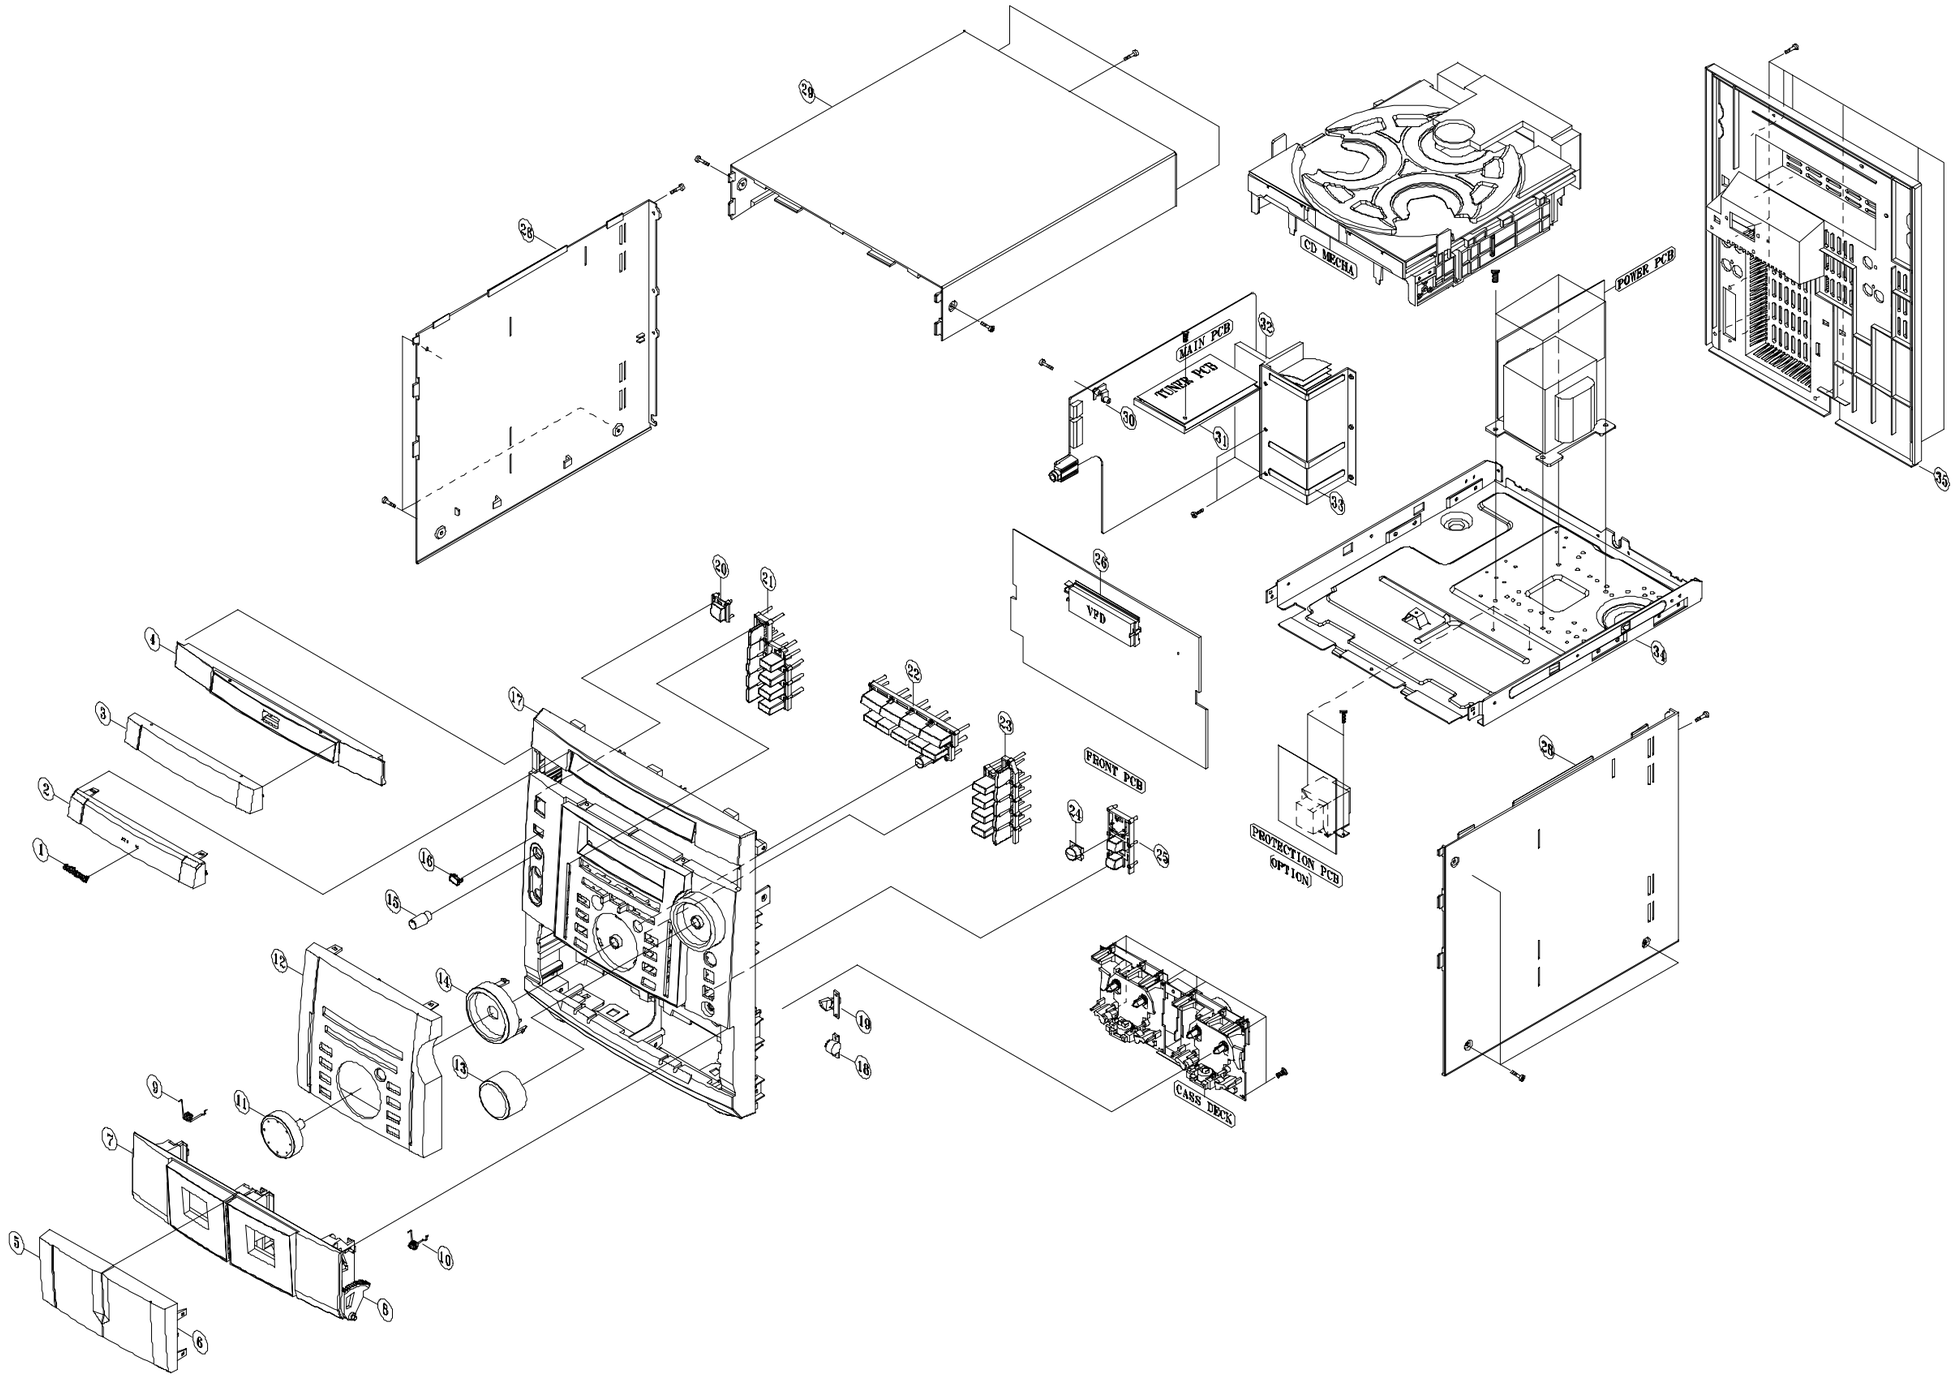

No.	Code No.	Description ; Specification	Q'ty	REMARK
1	AH64-70003K	BADGE-BRAND,35mm,ABS,SILVER.	1	COMMON
2	AH64-01026B	WINDOW-CD;PMMA DARK BLUE	1	MAX-L42;L45/ZL45/EUR
	AH64-01026C	WINDOW-CD;PMMA DARK BLUE	1	MAX-L45/ZL45/NO EUR
3	AH64-01027B	WINDOW-DOOR,CD;PMMA DARK BLUE	1	MAX-L42/L45
	AH64-01027C	WINDOW-DOOR,CD;PMMA DARK BLUE	1	MQ-L42
	AH64-01027D	WINDOW-DOOR,CD;PMMA DARK BLUE	1	MAX-L45/EUR
	AH64-01027E	WINDOW-DOOR,CD;PMMA BLUE	1	MAX-L45/NO EUR
	AH64-01027F	WINDOW-DOOR,CD;PMMA BLUE	1	MQ-L45
	AH64-01027G	WINDOW-DOOR,CD;PMMA DARK BLUE	1	MAX-ZL45/EUR
	AH64-01027H	WINDOW-DOOR,CD;PMMA BLUE	1	MAX-ZL45/NO EUR
	AH64-01027P	WINDOW-DOOR,CD;PMMA DARK GRAY	1	MAX-L42G
4	AH64-01024B	DOOR-CD;ABS L/GRAY	1	MAX-L42/L45
	AH64-01024C	DOOR-CD;ABS L/GRAY	1	MAX-ZL45
	AH64-01024G	DOOR-CD;ABS D/GRAY	1	MAX-L42G
5	AH64-01028B	WINDOW-DOOR,A ;PMMA DARK BLUE	1	MAX-L42;L45/ZL45/EUR
	AH64-01028C	WINDOW-DOOR,A ;PMMA BLUE	1	MAX-L45/ZL45/NO EUR
6	AH64-01029B	WINDOW-DOOR,B ;PMMA DARK BLUE	1	MAX-L42
	AH64-01029C	WINDOW-DOOR,B ;PMMA DARK BLUE	1	MQ-L42;MAX-L45/ZL45/EUR
	AH64-01029D	WINDOW-DOOR,B ;PMMA BLUE	1	MAX-L45/ZL45/NO EUR
7	AH64-01012B	DOOR-CASS,A;ABS L/GRAY	1	COMMON
	AH64-01012D	DOOR-CASS,A;ABS D/GRAY	1	MAX-L42G
8	AH64-01023B	DOOR-CASS,B;ABS L/GRAY	1	COMMON
	AH64-01023D	DOOR-CASS,B;ABS D/GRAY	1	MAX-L42G
9	AH61-62004C	SPRING-EJECT,A;STS1.0	1	COMMON
10	AH61-62005C	SPRING-EJECT,A;STS1.0	1	COMMON
11	AH64-01036B	KNOB-JOG;ABS L/GRAY	1	COMMON
12	AH64-01025B	WINDOW-VFD;PMMA DARK BLUE	1	MAX-L42/NO EUR
	AH64-01025C	WINDOW-VFD;PMMA DARK BLUE	1	MAX-L42/EUR
	AH64-01025D	WINDOW-VFD;PMMA DARK BLUE	1	MQ-L42/L420
	AH64-01025E	WINDOW-VFD;PMMA BLUE	1	MAX-L45/NO EUR
	AH64-01025F	WINDOW-VFD;PMMA DARK BLUE	1	MAX-L45/EUR
	AH64-01025G	WINDOW-VFD;PMMA BLUE	1	MAX-ZL45/NO EUR
	AH64-01025H	WINDOW-VFD;PMMA DARK BLUE	1	MAX-ZL45/EUR
13	AH64-01035B	KNOB-VOLUME;ABS L/GRAY	1	COMMON
14	AH61-00602B	CAP-JOG;ABS L/GRAY	1	COMMON
15	AH64-01037B	KNOB-MIC;ABS L/GRAY	1	COMMON(OPTION)
16	AH67-00108A	LENS-REMOCON;PC BLUE	1	COMMON
17	AH64-01010B	CABINET-FRONT;MIPS L/GRAY	1	MAX-L42/L45/ZL45/WITHOUT MIC&RDS
	AH64-01010C	CABINET-FRONT;MIPS L/GRAY	1	MAX-L42/L45/ZL45/WITHIN MIC
	AH64-01010D	CABINET-FRONT;MIPS L/GRAY	1	MAX-L42/L45/ZL45/WITHIN RDS
	AH64-01010S	CABINET-FRONT;MIPS D/GRAY	1	MAX-L42G
18	AH61-80030A	DAMPER-ASS'Y	1	COMMON
19	AH95-50001A	LATCH-ASS'Y	1	COMMON
20	AH64-01030B	KNOB-POWER;ABS L/GRAY	1	COMMON
21	AH64-01032B	KNOB-DEMO;ABS L/GRAY	1	COMMON
22	AH64-01034B	KNOB-FUNCTION;ABS L/GRAY	1	COMMON
23	AH64-01033B	KNOB-PROGRAM;ABS L/GRAY	1	COMMON

No.	Code No.	Description ; Specification	Q'ty	REMARK
24	AH67-00097B	LENS-P/SOUND;PMMA CLEAR	1	COMMON
25	AH64-01031B	KNOB-CD,OPEN;ABS L/GRAY	1	COMMON
26	AH61-00603A	HOLDER-VFD;ABS BLACK	1	COMMON
27	AH64-00432B	CABINET-SIDE,R;HIPS M/GRAY	1	COMMON
	AH64-00432E	CABINET-SIDE,R;HIPS D/GRAY	1	MAX-L42G
28	AH64-00431B	CABINET-SIDE,L;HIPS V2 GRADE,M/GRAY	1	COMMON
	AH64-00431E	CABINET-SIDE,L;HIPS,D/GRAY	1	MAX-L42G
29	AH64-30443F	CABINET-TOP;HIPS M/GRAY	1	COMMON
	AH64-30443H	CABINET-TOP;HIPS D/GRAY	1	MAX-L42G
30	AH61-00021B	SUPPORT-PCB;ABS BLACK	1	COMMON
31	AH61-20540B	HOLDER-TUNER;ABS BLACK	1	COMMON
32	AH62-00023A	HEAT-SINK,MAIN;AL	1	COMMON
33	AH61-00250B	BRACKET-HEAT/SINK;SECC 0.8T	1	COMMON
34	AH64-30416D	CABINET-BOTTOM;SECC 1.0T	1	COMMON
35	AH64-00591H	CABINET-REAR;HIPS V2 GRADE M/'GRAY	1	MAX-L42/L45/ZL45
	AH64-00591G	CABINET-REAR;HIPS V2 GRADE M/'GRAY	1	MAX-L42/L45/ZL45/DIGITAL OUT
	AH64-00591K	CABINET-REAR;HIPS D/'GRAY	1	MAX-L42G

2-6-1. Application Model :MAXL42/L42G/L45

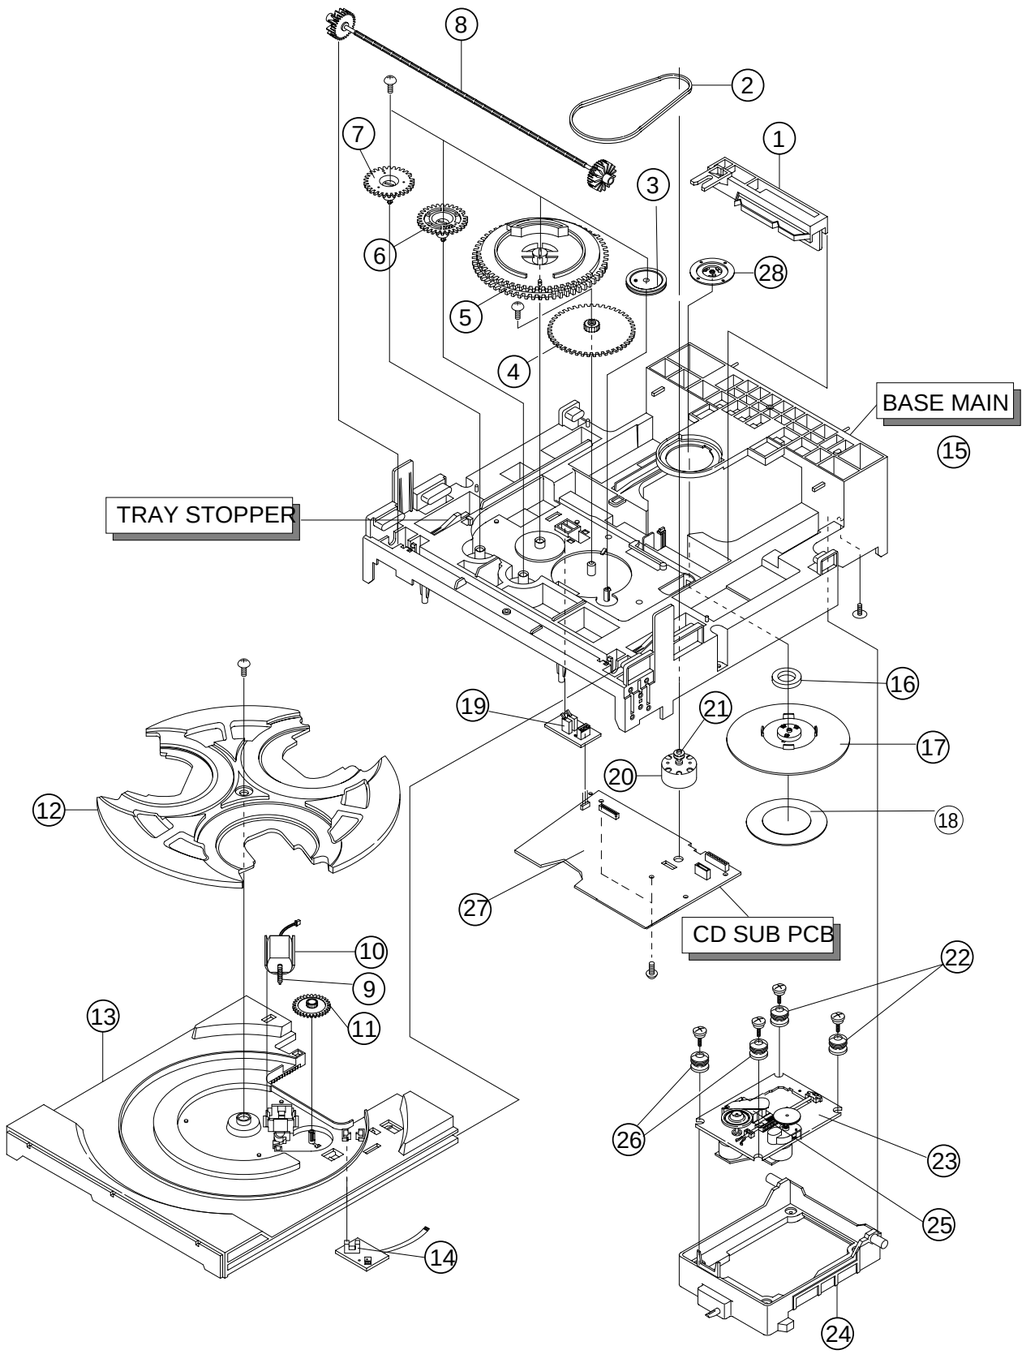

No.	Code No.	Description	Specification	Remarks
	CMS300-V	ASS'Y-DECK	CMS-300	
1	AH66-80022A	SLIDER-CAM	ABS HF-380 NTR	
2	AH66-60034A	BELT-LOAD	CR	
3	AH66-20186A	GEAR-PULLEY	POM (M90-44) WHT	
4	AH66-20187A	GEAR-LOAD	POM (M90-44) BLK	
5	AH66-20188B	GEAR-CAM	POM (M90-44) WHT	
6	AH66-20189B	GEAR-TRAY	POM (M90-44) BLK	
7	AH66-20190B	GEAR-CONVERT	POM (M90-44) WHT	
8	AH66-20191A	GEAR-SYNCRO	ABS HF-380 NTR	
9	AH66-20192A	GEAR-WORM	POM(M90-44),M0.5,PCD4.5	
10	AH31-12001A	MOTOR-LOADING	FF-030PN-09120	
11	AH66-20193A	GEAR-ROULLETE	POM(M90-44) BLK	
12	AH63-00324A	TRAY-ROULLETE	ABS XR-401 BLK	
13	AH63-00325A	TRAY-DISC	ABS BLK	
14	AH32-10001F	SENSOR	KPI-L06	
15	AH61-00837A	BASE-MAIN	ABS,NATURAL,CMS-300	
16	3302-000159	MAGNET	AC,3500-3800G,2.6-3.2MGOe,30	
17	AH63-90053A	TABLE-CHUCK	,ABS,+GF20%,BLK,	
18	AH63-00068B	SHEET-CHUCK	SHEET,HYMERON,BLK,0.4T	
19	3405-000101	SWITCH -MICRO	MLS-24	
20	AH31-10021A	MOTOR-DC	RF-500TB,9VDC/130MA	
21	AH66-10008A	PULLEY-MOTOR	POM,BLK,CMS-CR3	
22	AH73-10031A	RUBBER-CD(R)	SI,CMS-300,40,RED	
23	AH91-60150C	CDP DECK ASSY	CMS-D73SG6U	
24	AH66-30098A	LEVER-LIFTER	ABS BLK CMS-300	
25	AH30-00007A	PICK-UP	SOH-AD3	
26	AH73-10034A	RUBBER-CD(G)	SI,CMS-300,40,GREEN	
27	AH92-00922A	ASS'Y PCB CD MAIN		
28	AH61-00225A	BRKT-CHUCK	SECL 0.8t	

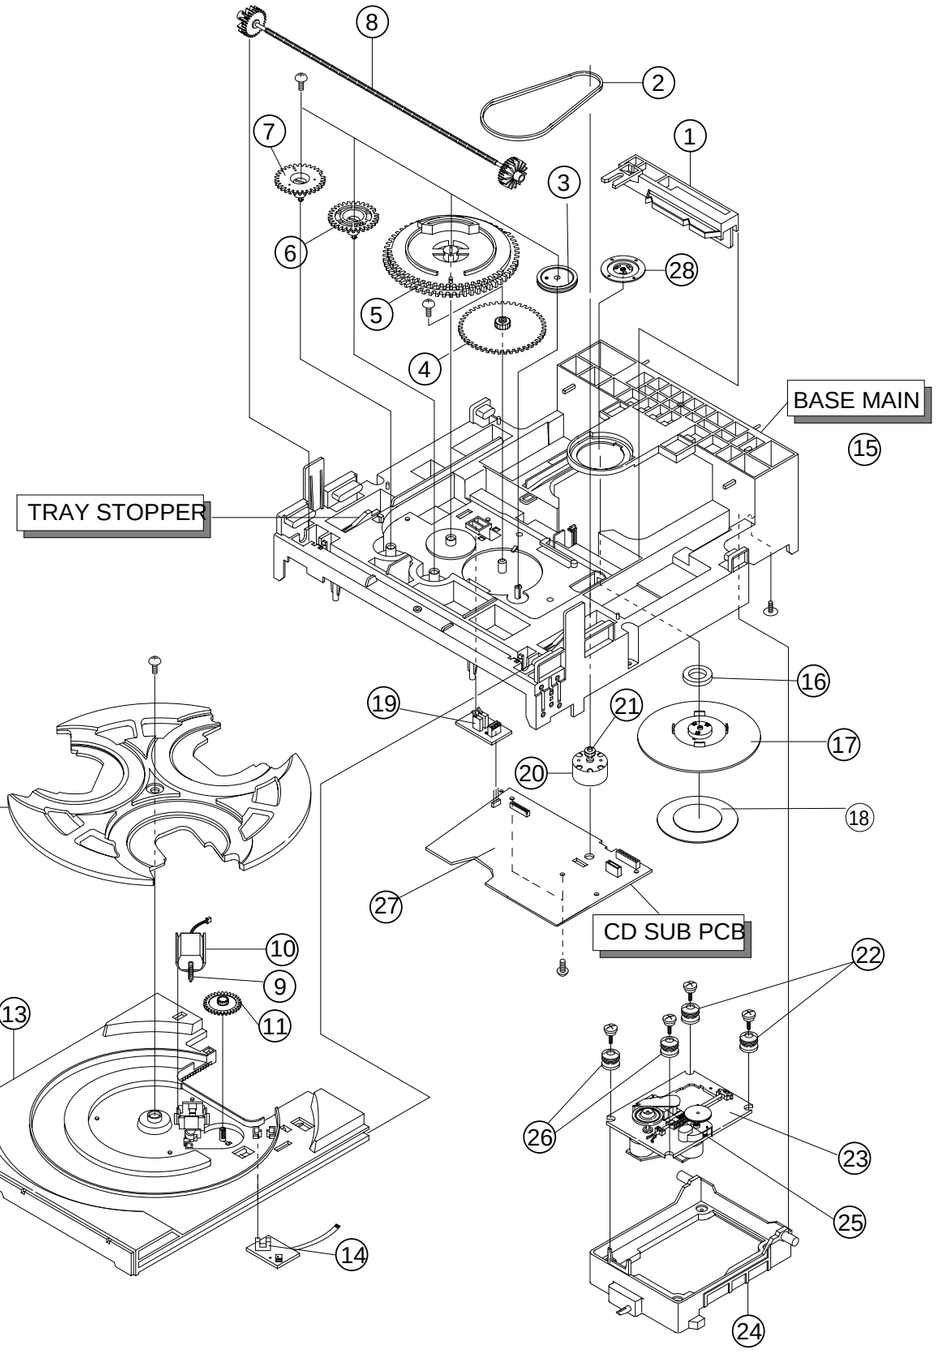

No.	Code No.	Description	Specification	Remarks
	CMS300-X	ASS'Y-DECK	CMS-300	
1	AH66-80022A	SLIDER-CAM	ABS HF-380 NTR	
2	AH66-60034A	BELT-LOAD	CR	
3	AH66-20186A	GEAR-PULLEY	POM (M90-44) WHT	
4	AH66-20187A	GEAR-LOAD	POM (M90-44) BLK	
5	AH66-20188B	GEAR-CAM	POM (M90-44) WHT	
6	AH66-20189B	GEAR-TRAY	POM (M90-44) BLK	
7	AH66-20190B	GEAR-CONVERT	POM (M90-44) WHT	
8	AH66-20191A	GEAR-SYNCRO	ABS HF-380 NTR	
9	AH66-20192A	GEAR-WORM	POM(M90-44),M0.5,PCD4.5	
10	AH31-12001A	MOTOR-LOADING	FF-030PN-09120	
11	AH66-20193A	GEAR-ROULLETE	POM(M90-44) BLK	
12	AH63-00324A	TRAY-ROULLETE	ABS XR-401 BLK	
13	AH63-00325A	TRAY-DISC	ABS BLK	
14	AH32-10001F	SENSOR	KPI-L06	
15	AH61-00837A	BASE-MAIN	ABS,NATURAL,CMS-300	
16	3302-000159	MAGNET	AC,3500-3800G,2.6-3.2MGOe,30	
17	AH63-90053A	TABLE-CHUCK	,ABS,+GF20%,BLK,	
18	AH63-00068B	SHEET-CHUCK	SHEET,HYMERON,BLK,0.4T	
19	3405-000101	SWITCH -MICRO	MLS-24	
20	AH31-10021A	MOTOR-DC	RF-500TB,9VDC/130MA	
21	AH66-10008A	PULLEY-MOTOR	POM,BLK,CMS-CR3	
22	AH73-10031A	RUBBER-CD(R)	SI,CMS-300,40,RED	
23	AH91-60150C	CDP DECK ASSY	CMS-D73SG6U	
24	AH66-30098A	LEVER-LIFTER	ABS BLK CMS-300	
25	AH30-00007A	PICK-UP	SOH-AD3	
26	AH73-10034A	RUBBER-CD(G)	SI,CMS-300,40,GREEN	
27	AH92-00922B	ASS'Y PCB CD MAIN	MP3	
28	AH61-00225A	BRKT-CHUCK	SECL 0.8t	

* CAUSION : It is used the bonding, connet NET FRAME(or FRONT PANEL ASS'Y) to CABINET ASS'Y.
So when the disassembly, take extreme care not to demage the SPEAKER.

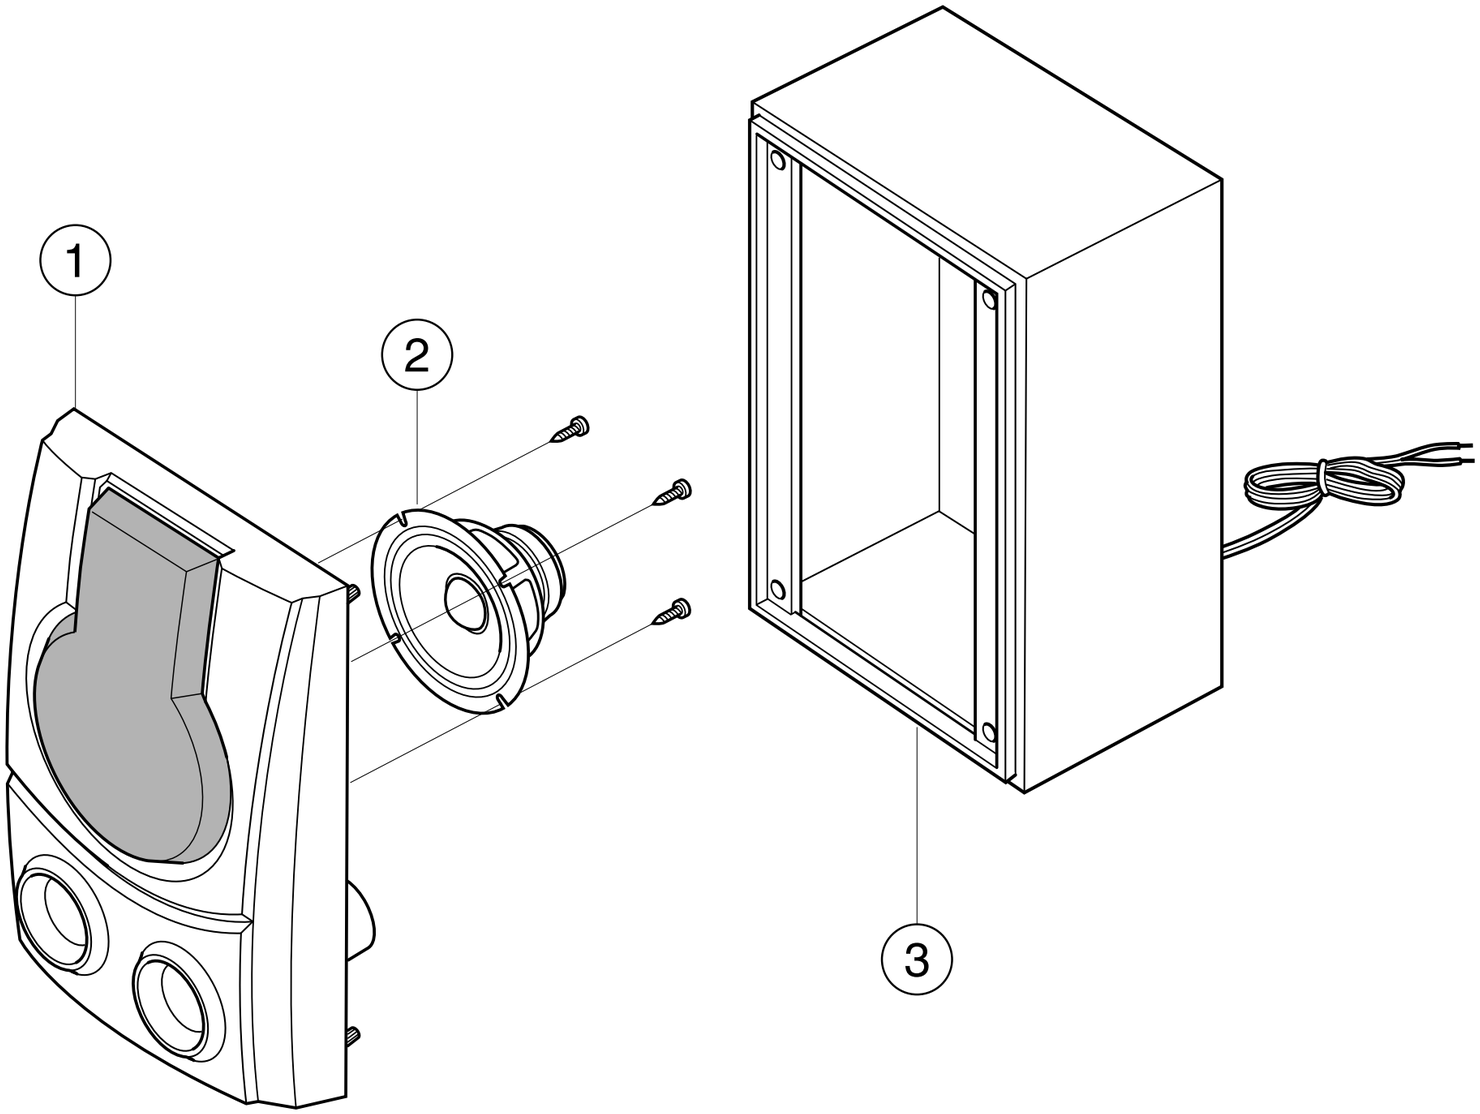

Application Model ; MAXL45/ZL45

*PS L45E/ZL45E : AH81-00350A

No	ITEM	CODE No
1	FRONT PANEL	AH81-00350B
2	UNIT (SILVER)	AH81-00350G
3	CABINET	AH81-00350E
4	PS L45, 1PC	AH81-00350R

Application Model ; MAXL42/L42G

*PS L42E : AH81-00350M

No	ITEM	CODE No
1	FRONT PANEL	AH81-00350B
2	UNIT (BLACK)	AH81-00350F
3	CABINET	AH81-00350E
4	PS L42/420, 1PC	AH81-00350S

Application Model ; MAXL47

* CAUSION : It is used the bonding, connet NET FRAME(or FRONT PANEL ASS'Y) to CABINET ASS'Y.
So when the disassembly, take extreme care not to demage the SPEAKER.

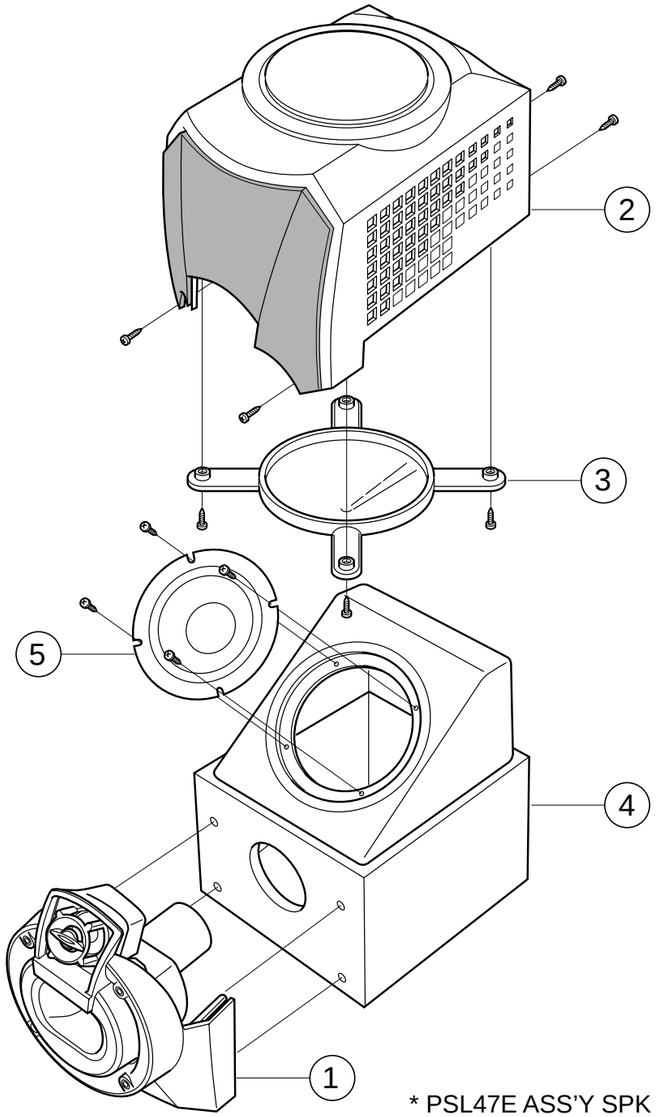

* PSL47E ASS'Y SPK ; AH81-00254M

No	ITEM	Code No
1	FRONT PANEL ASS'Y	AH81-00277A
2	TOP PANEL ASS'Y	AH81-00277D
3	REFLECTOR	AH81-00277G
4	CABINET ASS'Y 5 1/4"	AH81-00277M
5	UNIT W/F 5 1/4"	AH81-00277S
6	PSL47,1PC	AH81-00254P